



Deep Groove Ball Bearing (Si3N4)

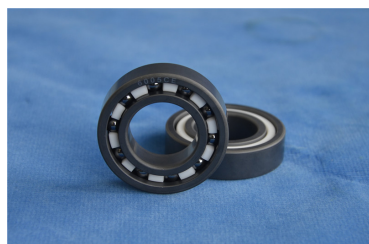

オープン ベアリン グ	ディメンション(mm)				マウント・ディメンション(mm)				基準重み
	ボア d	過剰 摂取	幅B	面取 りR(min)	ダミ ン	ダ・マッ クス	ダ・マッ クス	RAマッ クス	
東城数									(kg)
683	3	7	2	0.1		/			0.00013
693	3	8	3	0.15		/			0.00025
603	3	9	3	0.15		/			0.0004
623	3	10	4	0.15		/			0.0007
633	3	13	5	0.15		/			0.0014
684	4	9	2.5	0.1	4.8	/	8.2	0.1	0.0003
694	4	11	4	0.15	5.2	/	9.8	0.15	0.0007
604	4	12	4	0.2	5.6	/	10.4	0.2	0.0009
624	4	13	5	0.2	5.6	/	11.4	0.2	0.0013
634	4	16	5	0.3	6	/	14	0.3	0.0022
685	5	11	3	0.15	6.2	/	9.8	0.15	0.0005
695	5	13	4	0.2	6.6	/	11.4	0.2	0.001
605	5	14	5	0.2	6.6	/	12.4	0.2	0.0015
625	5	16	5	0.3	7	/	14	0.3	0.0021
635	5	19	6	0.3	7	/	17	0.3	0.0036
686	6	13	3.5	0.15	7.2	/	11.8	0.15	0.0008
696	6	15	5	0.2	7.6	/	13.4	0.2	0.0016
606	6	17	6	0.3	8	/	15	0.3	0.0025
626	6	19	6	0.3	8	/	17	0.3	0.0034

Deep Groove Ball Bearing (Si3N4)

636	6	22	7	0.3	8	/	20	0.3	0.0058
687	7	14	3.5	0.15	8.2	/	12.8	0.15	0.0009
697	7	17	5	0.3	9	/	15	0.3	0.0022
607	7	19	6	0.3	9	/	17	0.3	0.0032
627	7	22	7	0.3	9	/	20	0.3	0.0053
637	7	26	9	0.3	9	/	24	0.3	0.01
688	8	16	4	0.2	9.6	/	14.4	0.2	0.0014
698	8	19	6	0.3	10	/	17	0.3	0.003
608	8	22	7	0.3	10	/	20	0.3	0.005
628	8	24	8	0.3	10	/	22	0.3	0.0072
638	8	28	9	0.3	10	/	26	0.3	0.012