



Deep Groove Ball Bearing (ZrO2)

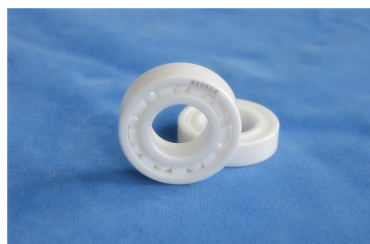

方位番号	ディメンション(mm)				マウント・ディメンション(mm)				基準重量(kg)
	d	D	B	r(min)	ダミン	ダ・マックス	ダ・マックス	RAマックス	
683	3	7	2	0.1		/			0.00024
693	3	8	3	0.15		/			0.0005
603	3	9	3	0.15		/			0.0007
623	3	10	4	0.15		/			0.0013
633	3	13	5	0.15		/			0.0025
684	4	9	2.5	0.1	4.8	/	8.2	0.1	0.0005
694	4	11	4	0.15	5.2	/	9.8	0.15	0.0013
604	4	12	4	0.2	5.6	/	10.4	0.2	0.0017
624	4	13	5	0.2	5.6	/	11.4	0.2	0.0023
634	4	16	5	0.3	6	/	14	0.3	0.004
685	5	11	3	0.15	6.2	/	9.8	0.15	0.0009
695	5	13	4	0.2	6.6	/	11.4	0.2	0.0019
605	5	14	5	0.2	6.6	/	12.4	0.2	0.0027
625	5	16	5	0.3	7	/	14	0.3	0.0038
635	5	19	6	0.3	7	/	17	0.3	0.0066
686	6	13	3.5	0.15	7.2	/	11.8	0.15	0.0015
696	6	15	5	0.2	7.6	/	13.4	0.2	0.003
606	6	17	6	0.3	8	/	15	0.3	0.0046
626	6	19	6	0.3	8	/	17	0.3	0.0063
636	6	22	7	0.3	8	/	20	0.3	0.0108

Deep Groove Ball Bearing (ZrO2)

687	7	14	3.5	0.15	8.2	/	12.8	0.15	0.0017
697	7	17	5	0.3	9	/	15	0.3	0.004
607	7	19	6	0.3	9	/	17	0.3	0.0059
627	7	22	7	0.3	9	/	20	0.3	0.0098
637	7	26	9	0.3	9	/	24	0.3	0.0185
688	8	16	4	0.2	9.6	/	14.4	0.2	0.0025
698	8	19	6	0.3	10	/	17	0.3	0.0056
608	8	22	7	0.3	10	/	20	0.3	0.0093
628	8	24	8	0.3	10	/	22	0.3	0.013
638	8	28	9	0.3	10	/	26	0.3	0.022